



GEN. TOLERANCES	0.5 - 6	±0.1	6 - 30	±0.2	30 - 120	±0.3	120 - 315	±0.5	315 - 1000	±0.8	1000 - 2000	±1.2	2000 - 4000	±2	4000 - 8000	±3
GEN. MACHINING		0.4		1.6		3.2		6.3		12.6		25 ROUGH				

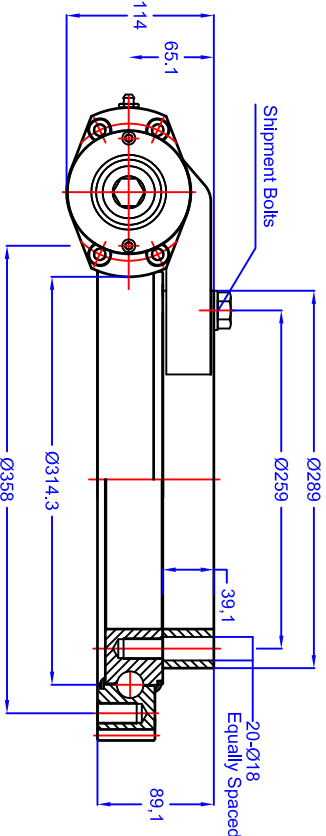

Slewing Drive Performance Data			
Rated Output Speed	< 2.5 rpm		
Output Torque (Max.)	7.5 kN.m	5532 lb.ft	
Tilting Moment Torque (Max.)	54.3 kN.m	40×10 ³ lb.ft	
Holding Torque	43 kN.m	32×10 ³ lb.ft	
Axial Load (Max.)	475 kN	107×10 ³ lbf	
Radial Load (Max.)	190 kN	43×10 ³ lbf	
Ratio of Worm Gear	78:1		
Tracking Precision	≤ 0.17 °		

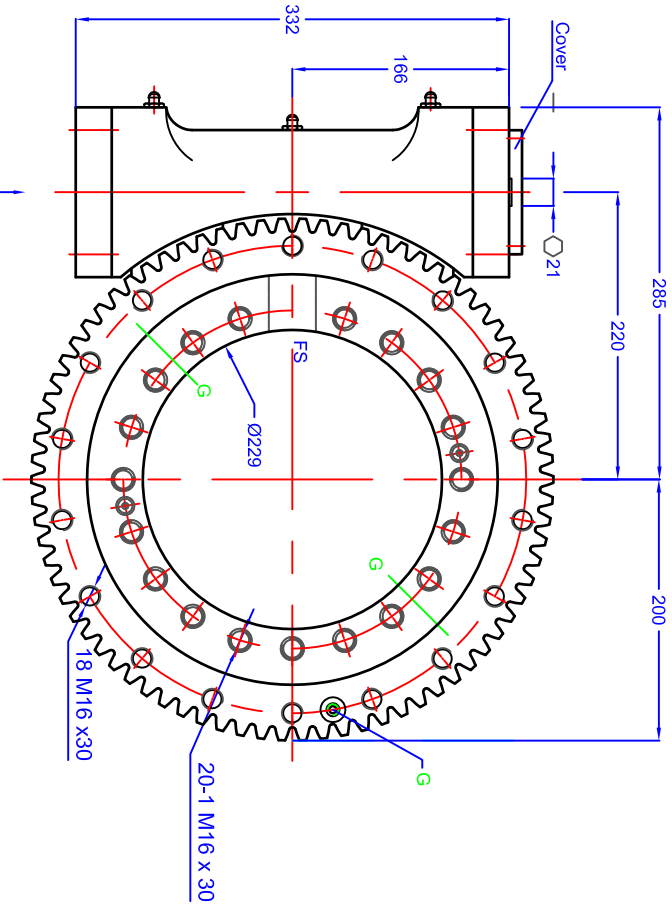